

Arch Game Engine

0.2

Generated by Doxygen 1.8.11

Contents

- 1 Hierarchical Index** **1**
 - 1.1 Class Hierarchy 1

- 2 Class Index** **3**
 - 2.1 Class List 3

- 3 Class Documentation** **5**
 - 3.1 Audio Class Reference 5
 - 3.1.1 Detailed Description 5
 - 3.2 Background Class Reference 5
 - 3.2.1 Detailed Description 6
 - 3.3 Collision Class Reference 6
 - 3.3.1 Detailed Description 7
 - 3.4 Engine::color Struct Reference 7
 - 3.4.1 Detailed Description 7
 - 3.5 Engine Class Reference 8
 - 3.5.1 Detailed Description 9
 - 3.5.2 Member Function Documentation 10
 - 3.5.2.1 update() 10
 - 3.6 Entity Class Reference 10
 - 3.6.1 Detailed Description 12
 - 3.7 GameState Class Reference 12
 - 3.7.1 Detailed Description 12
 - 3.8 Image Class Reference 13

3.8.1 Detailed Description	13
3.9 Input Class Reference	13
3.9.1 Detailed Description	15
3.10 Level Class Reference	16
3.10.1 Detailed Description	17
3.11 Map Class Reference	17
3.11.1 Detailed Description	17
3.12 Model Class Reference	18
3.12.1 Detailed Description	18
3.13 Object Class Reference	18
3.13.1 Detailed Description	21
3.14 PerlinNoise Class Reference	21
3.14.1 Detailed Description	22
3.15 Physics Class Reference	22
3.15.1 Detailed Description	22
3.16 Stage Class Reference	22
3.16.1 Detailed Description	23
3.17 Tile Class Reference	23
3.17.1 Detailed Description	25
3.18 Tileset Class Reference	25
3.18.1 Detailed Description	26
Index	27

Chapter 1

Hierarchical Index

1.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Audio	5
Collision	6
Engine::color	7
Engine	8
GameState	12
Image	13
Input	13
Level	16
Map	17
Model	18
Object	18
Background	5
Entity	10
Tile	23
PerlinNoise	21
Physics	22
Stage	22
Tileset	25

Chapter 2

Class Index

2.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Audio	5
Background		
	Object that is a background image that covers the screen	5
Collision		
	Class used for calculating different types of collision between given Objects	6
Engine::color	7
Engine		
	Class for declaring an engine, which does basic SDL commands like creating the window and renderer	8
Entity		
	Class for storing health, emotion, team, etc. of an Object	10
GameState	12
Image		
	Class for loading in SDL Textures	13
Input		
	Class for checking and storing keyboard and mouse input	13
Level		
	This class stores a Stage and Objects and can move them and display them	16
Map		
	This class takes in a file and loads it in for the map	17
Model	18
Object		
	This class stores information for an Object in the game	18
PerlinNoise	21
Physics		
	Class for doing physics functions	22
Stage		
	Stores a Map and Tileset	22
Tile		
	An Object class that stores the a tile value and name	23
Tileset		
	Class for loading in multiple Tiles	25

Chapter 3

Class Documentation

3.1 Audio Class Reference

Public Member Functions

- void **load** (const char *filename)
- void **play** ()

3.1.1 Detailed Description

Definition at line 6 of file audio.h.

The documentation for this class was generated from the following files:


- audio.h
- audio.cpp

3.2 Background Class Reference


[Object](#) that is a background image that covers the screen.

```
#include <background.h>
```

Inheritance diagram for Background:



Collaboration diagram for Background:

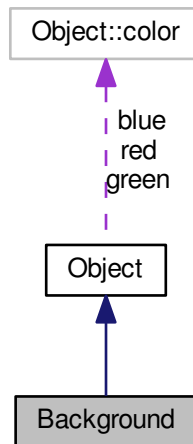

Public Member Functions

- void [setBackground](#) (string file, int w, int h, SDL_Renderer *ren)
Sets the background with a path to the file name, the width and height of the screen, and the renderer.

Additional Inherited Members

3.2.1 Detailed Description

[Object](#) that is a background image that covers the screen.

Definition at line 7 of file background.h.

The documentation for this class was generated from the following files:

- background.h
- background.cpp

3.3 Collision Class Reference

Class used for calculating different types of collision between given Objects.

```
#include <collision.h>
```

Public Member Functions

- bool `isTouching` (`Object a`, `Object b`)
Check if two objects are touching.
- bool `contains` (`Object a`, `Object b`)
Check if an object contains another object.
- bool `outOfBoundsOf` (`Object a`, `Object b`)
Check if two object are not touching.
- bool `isAbove` (`Object a`, `Object b`)
Check if the first object is above the second object.
- bool `isBelow` (`Object a`, `Object b`)
Check if the first object is below the second object.
- bool `isRightOf` (`Object a`, `Object b`)
Check if the first object is to the right of the second object.
- bool `isLeftOf` (`Object a`, `Object b`)
Check if the first object is to the left of the second object.
- bool `overlaps` (`Object a`, `Object b`)

3.3.1 Detailed Description

Class used for calculating different types of collision between given Objects.

Definition at line 7 of file collision.h.

The documentation for this class was generated from the following files:

- collision.h
- collision.cpp

3.4 Engine::color Struct Reference

Public Attributes

- `UInt8 r`
- `UInt8 g`
- `UInt8 b`

3.4.1 Detailed Description

Definition at line 133 of file engine.h.

The documentation for this struct was generated from the following file:

- engine.h

3.5 Engine Class Reference

Class for declaring an engine, which does basic SDL commands like creating the window and renderer.

```
#include <engine.h>
```

Classes

- struct [color](#)

Public Member Functions

- [~Engine](#) ()
Deconstructs renderer and window and then quits SDL.
- void **setGravity** (double g)
- void **setFrameRate** (int f)
- double **getGravity** () const
- SDL_Renderer * **init** (string s, const int &w, const int &h, int flag)
Create a window with a given name, width, height, and anyother SDL_Window flags.
- SDL_Renderer * **init** (string s, const int &w, const int &h, int flag, int it)
Create a window with a given name, width, height, SDL_Window flags, and specified SDL_Init flags.
- SDL_Renderer * **init** (string s, const int &w, const int &h, int flag, int x, int y)
Create a window with a given name, width, height, SDL_Window flags, and specified x and y coordinate.
- SDL_Renderer * **init** (string s, const int &w, const int &h, int flag, int x, int y, int it)
Create a window with a given name, width, height, SDL_Window flags, specified x and y coordinate, and SDL_Init flags.
- void **setName** (string s)
Set window name.
- void **setPos** (int x, int y)
Set window position.
- void **setSize** (int w, int y)
Set window size.
- SDL_Renderer * **getRenderer** ()
Returns screen renderer.
- SDL_Window * **getWindow** () const
Returns screen window.
- void **setColor** (Uint8 r, Uint8 g, Uint8 b)
Sets SDL color.
- void **loopStart** ()
Call this at the beginning of a loop to initilaize the loop.
- void **render** ()
Call this at the end of the game loop to render.
- void **update** ()
Get fps.
- void **setBackground** ([Background](#) b)
Set background.
- void **setBackground** (string filename)
Set background with filename.
- [Background](#) **getBackground** () const
Get background.

- void `drawBackground` ()
Draw background.
- void `draw` (Object obj)
Draw an object on the screen.
- void `draw` (vector< Object > objs)
Draw a vector of Objects.
- void `draw` (vector< vector< Object >> objs)
- void `draw` (Object obj, int key)
Draw an object with a pass key before/during splash.
- void `draw` (Level lvl)
Draw the level.
- void `draw` (const char *text, int x, int y, int r, int g, int b)
Write to the screen with a char, coordinates, color, ttf file.
- void `splash` ()
Calls splashscreen at the beginning of the game. This is automatically called unless deactivated.
- void `bypassSplash` (int key)
Deactivates the splashscreen, requires key.
- bool `hasSplashed` ()
Check if the splashscreen has occurred.
- void `debugMode` (bool d)
Active debugger with Boolean.
- void `loadFont` (char *font_path)
- void `hideMouse` ()
- void `showMouse` ()
- bool `getRunning` () const
- void `setRunning` (bool r)
- void `setGLView` (int a, int b, int c, int d, int e, int f, int g, int h, int i)
- void `setGLMode` (bool m)
- int `getFPS` () const
- void `loop` ()
- int `getTicks` ()
- void `delay` (int time)
- void `enableTransparency` ()
- void `setGamestate` (int s)
- int `getGameState` ()
- void `setSplashColor` (int r, int g, int b)

3.5.1 Detailed Description

Class for declaring an engine, which does basic SDL commands like creating the window and renderer.

Definition at line 36 of file engine.h.

3.5.2 Member Function Documentation

3.5.2.1 void Engine::update ()

Get fps.

Update loop time.

Definition at line 134 of file engine.cpp.

```
134         {
135     //simulationTime += 16;
136     //if(simulationTime < realTime) { fps = true; } else { fps = false; }
137     if(glMode) {
138         glClear( GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT);
139         glMatrixMode( GL_MODELVIEW );
140         glLoadIdentity( );
141         gluLookAt( glView[0], glView[1], glView[2], glView[3], glView[4], glView[5], glView[6], glView[7], glView[8]);
142     }
143 }
```

The documentation for this class was generated from the following files:


- engine.h
- engine.cpp

3.6 Entity Class Reference


Class for storing health, emotion, team, etc. of an [Object](#).

```
#include <entity.h>
```

Inheritance diagram for Entity:



Collaboration diagram for Entity:

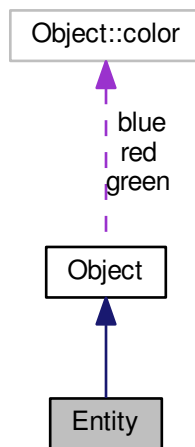

Public Member Functions

- double `getHealth` () const
Get Entity's health.
- void `setHealth` (double h)
Set the Entity's health. If the health is higher then the max health it will set it to the max health.
- double `getMaxHealth` () const
Get max health.
- void `setMaxHealth` (double mh)
Set max health.
- void `damage` (double d)
Deal damage. Subtracted from health. If health is less then zero it kills the entity.
- void `heal` (double h)
Give health to the Entity.
- int `getEmotion` () const
Get current emotion state.
- void `setEmotion` (int e)
Set current emotion state.
- int `getTeam` () const
Get Entity's team.
- void `setTeam` (int t)
Set Entity's team.
- bool `isActive` () const
Check if Entity is active.
- void `kill` ()
Sets health to zero and deactivates the Entity.
- void `deactivate` ()
Sets active to false.

- void `activate` ()
Sets active to true.
- void `checkDisplayable` (`Object` screen)
Checks if an the `Entity` is in the current screen by passing the screen to it.
- `SDL_Rect` `getDetect` () const
Returns the detection radius.
- void `setDetect` (`SDL_Rect` d)
Sets the detection with another `SDL_Rect`.
- void `setDetectRange` (int r)
Sets the detection radius with a single given distance.
- void `setDetectRange` (int w, int h)
Sets the detection radius with two given distances in both directions.

Additional Inherited Members

3.6.1 Detailed Description

Class for storing health, emotion, team, etc. of an `Object`.

Definition at line 9 of file `entity.h`.

The documentation for this class was generated from the following files:

- `entity.h`
- `entity.cpp`

3.7 GameState Class Reference

Public Member Functions

- int `getGameState` ()
- void `setGameState` (int)

Public Attributes

- int `SPLASH` = 0
- int `MENU` = 1
- int `INGAME` = 2
- int `GAMEOVER` = 3
- int `PAUSE` = 4

3.7.1 Detailed Description

Definition at line 4 of file `gamestate.h`.

The documentation for this class was generated from the following files:

- `gamestate.h`
- `gamestate.cpp`

3.8 Image Class Reference

Class for loading in SDL Textures.

```
#include <image.h>
```

Public Member Functions

- void [loadImage](#) (string file, SDL_Renderer *ren)
Load in either a BMP or PNG file with the path and renderer.
- void [loadPNG](#) (string file, SDL_Renderer *ren)
Load in a PNG image with the path to the PNG file and the renderer.
- void [loadBMP](#) (string file, SDL_Renderer *ren)
Load in a BMP image with the path to the BMP file and the renderer.
- SDL_Texture * [getTexture](#) ()
Get SDL_Texture.
- void [setImage](#) (SDL_Texture *t)
Set new, preloaded texture, to [Image](#).
- string [getFile](#) () const
Get path file of the image.
- void [setFile](#) (string f)
Set path file to the image.
- void [setTexture](#) (SDL_Texture *t)
Set texture.
- void [setSurface](#) (SDL_Surface *s, SDL_Renderer *ren)

3.8.1 Detailed Description

Class for loading in SDL Textures.

Definition at line 11 of file image.h.

The documentation for this class was generated from the following files:

- image.h
- image.cpp

3.9 Input Class Reference

Class for checking and storing keyboard and mouse input.

```
#include <input.h>
```

Public Member Functions

- void `logPress ()`
Log all current keys and buttons being pressed.
- bool `checkKey (int k)`
Check if a key has been pressed using a given key from this class. Ex: `Input i; i.checkKey(i.up);`.
- bool `reset ()`
Reset all pressed keystrokes and other inputs to false. Automatically down at the beginning of each `logPress()`.
- int `getMouseX () const`
- int `getMouseY () const`

Public Attributes

- int `left`
Log ID for left.
- int `right`
Log ID for right.
- int `up`
Log ID for up.
- int `down`
Log ID for down.
- int `q`
Log ID for q.
- int `w`
Log ID for w.
- int `e`
Log ID for e.
- int `r`
Log ID for r.
- int `t`
Log ID for t.
- int `y`
Log ID for y.
- int `u`
Log ID for u.
- int `i`
Log ID for i.
- int `o`
Log ID for o.
- int `p`
Log ID for p.
- int `a`
Log ID for a.
- int `s`
Log ID for s.
- int `d`
Log ID for d.
- int `f`
Log ID for f.
- int `g`

- `int g`
Log ID for g.
- `int h`
Log ID for h.
- `int j`
Log ID for j.
- `int k`
Log ID for k.
- `int l`
Log ID for l.
- `int z`
Log ID for z.
- `int x`
Log ID for x.
- `int c`
Log ID for c.
- `int v`
Log ID for v.
- `int b`
Log ID for b.
- `int n`
Log ID for n.
- `int m`
Log ID for m.
- `int lshift`
Log ID for left shift.
- `int rshift`
Log ID for right shift.
- `int shift`
Shift ID for shift.
- `int quit`
Log ID for quit.
- `int esc`
Log ID for esc.
- `int mouseleft`
Log ID for left mouse click.
- `int mousemiddle`
Log ID for middle mouse click.
- `int mouseright`
Log ID for right mouse click.
- `int mouseup`
Log ID for scroll up on mouse wheel.
- `int mousedown`
Log ID for scroll down on mouse wheel.

3.9.1 Detailed Description

Class for checking and storing keyboard and mouse input.

Definition at line 9 of file `input.h`.

The documentation for this class was generated from the following files:

- `input.h`
- `input.cpp`

3.10 Level Class Reference

This class stores a [Stage](#) and Objects and can move them and display them.

```
#include <level.h>
```

Public Member Functions

- void [create](#) ()
Create the [Level](#) based on the given stage.
- void [setStage](#) ([Stage](#) s)
Give a [Stage](#) to the [Level](#).
- void [setStage](#) ([Map](#) m, [Tileset](#) t)
Create a [Stage](#) for the [Level](#) by giving a [Map](#) and a [Tileset](#).
- void [setScale](#) (int w, int h)
Scale the [Level](#) by giving it the width and height to scale by.
- void [setScale](#) (int s)
Scale the [Level](#) by giving it a single integer to scale by.
- void [calcPos](#) ()
Calculate the position of the level based on coordinates.
- vector< [Tile](#) > [getTilesToRender](#) ()
Return the Tiles that are currently on the screen.
- vector< [Object](#) > [getObjectsToRender](#) ()
Return the Objects that are currently on the screen.
- vector< [Entity](#) > [getEntitiesToRender](#) ()
Return the Entities that are currently on the screen.
- void [move](#) (int mx, int my)
Move the screen by passing in how much to move on the x and y coordinates.
- void **moveEntity** (int id, int mx, int my)
- void [setCoord](#) (double x, double y)
Set the coordinate for the screen with a given x and y.
- void [setX](#) (double x)
Set the x coordinate.
- void [setY](#) (double y)
Set the y coordinate.
- double [getX](#) () const
Get the x coordinate.
- double [getY](#) () const
Get the y coordinate.
- [Object](#) **getScreen** () const
- void [setScreenSize](#) (int w, int h)
Set the size of the screen by passing in the width and height.
- void [setPrecise](#) (bool p)
Active precise if you want the coordinates in a map file to go to that exact pixel, or leave it off if you want it to go to that [Tile](#).
- void [addObject](#) ([Object](#) o)
Add [Object](#) to [Level](#).
- void [addObject](#) (vector< [Object](#) > o)
Add vector of [Objects](#) to [Level](#).
- int [addEntity](#) ([Entity](#) e)

- *Add Entity to Level.*
- void `addEntity` (vector< `Entity` > e)
 - *Add vector of Entity's to Level.*
- int `setMainEntity` (`Entity` e)
 - *Set main Entity.*
- int `setMainEntity` (int m)
 - *Tell Level which one Entity is the main one.*
- void `setCameraMargin` (int wm, int hm)
- void `centerCamera` (int percentage)
- void `setLensMargin` (int wn, int hm)
- void `centerLens` (int percentage)
- `Object` `getCamera` ()
- `Object` `getLens` ()

3.10.1 Detailed Description

This class stores a `Stage` and Objects and can move them and display them.

Definition at line 10 of file level.h.

The documentation for this class was generated from the following files:

- level.h
- level.cpp

3.11 Map Class Reference

This class takes in a file and loads it in for the map.

```
#include <map.h>
```

Public Member Functions

- void `loadMap` (string filename)
 - *Read in map file with given path to the file.*
- int `getX` () const
 - *Get the start x coordinate found in the file.*
- int `getY` () const
 - *Get the start y coordinate found in the file.*
- vector< vector< int > > `getMap` () const
 - *Get the vector of integers found in the file.*

3.11.1 Detailed Description

This class takes in a file and loads it in for the map.

Definition at line 10 of file map.h.

The documentation for this class was generated from the following files:

- map.h
- map.cpp

3.12 Model Class Reference

Public Member Functions

- void **load** ()

3.12.1 Detailed Description

Definition at line 11 of file model.h.

The documentation for this class was generated from the following files:


- model.h
- model.cpp

3.13 Object Class Reference


This class stores information for an [Object](#) in the game.

```
#include <object.h>
```

Inheritance diagram for Object:

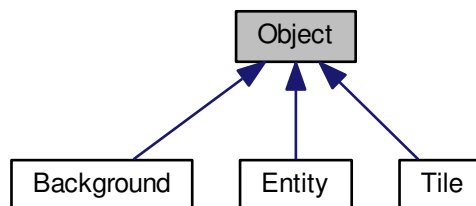

Collaboration diagram for Object:



Public Member Functions

- `SDL_Rect` **getBuff** () const
- `SDL_Rect` **getMovedBuff** () const
- void **actGravity** (bool g)
- void **setDisplayable** (bool d)
 - This sets if you want the [Object](#) to visible on the screen by passing in a boolean.*
- bool **isDisplayable** (`Object` screen)
 - Check if the [Object](#) is displayable by seeing if it is in a given screen.*
- virtual void **checkDisplayable** (`Object` screen)
 - Checks if the [Object](#) is in the given screen.*
- void **setCoord** (double x, double y)
 - Set the coordinate of the [Object](#) with a given x and y.*
- void **setX** (double sx)
 - Set the x coordinate with a given x.*
- void **setY** (double sy)
 - Set the y coordinate with a given y.*
- void **move** (double x, double y)
 - Move along the x and y coordinate with a given x and y amount.*
- void **moveX** (double mx)
 - Move along the x coordinate with a given x amount.*
- void **moveY** (double my)
 - Move along the y coordinate with a given y amount.*
- double **getX** () const
 - Get the current x coordinate.*
- double **getY** () const
 - Get the current y coordinate.*
- `Image` **getImage** () const
 - Get the [Object](#)'s [Image](#).*
- void **setImage** (`Image` i)
 - Set the [Object](#)'s [Image](#) with a given [Image](#).*
- void **setImage** (string file, `SDL_Renderer *ren`)
 - Give the path and renderer to create the [Object](#)'s [Image](#).*
- double **getAngle** () const
 - Get the [Object](#)'s angle.*
- void **setAngle** (double a)
 - Set the angle.*
- void **center** (int w, int h)
 - Center the [Object](#) based on a width and height.*
- `SDL_Rect` **getFrame** () const
 - Get the frame that the [Object](#) parses from the [Image](#).*
- `SDL_Rect` **getDest** () const
 - Get the destination for the [Object](#) to be displayed on screen.*
- `SDL_Rect` **getPos** () const
 - Get the position of the [Object](#) in the world.*
- void **setFrame** (`SDL_Rect` i)
 - Set the frame with a given `SDL_Rect`.*
- void **setDest** (`SDL_Rect` i)
 - Set the destination with a given `SDL_Rect`.*
- void **setPos** (`SDL_Rect` i)
 - Set the position with a given `SDL_Rect`.*

- void **setFrame** (int x, int y, int w, int h)
Set the frame with a given x and y coordinate and width and height.
- void **setFrameCoord** (int x, int y)
Set the x and y coordinate of the frame.
- void **setFrameSize** (int w, int h)
Set the size of the frame with a width and height.
- void **setFrameX** (int x)
Set the x coordinate of the frame.
- void **setVelTo** (Object o)
Set the object's velocity toward another object.
- void **lookAt** (Object o)
Set the object's angle towards another object.
- void **setFrameY** (int y)
Set the y coordinate of the frame.
- void **setFrameW** (int w)
- void **setFrameH** (int h)
- int **getFrameX** () const
- int **getFrameY** () const
- int **getFrameW** () const
- int **getFrameH** () const
- void **setDest** (int x, int y, int w, int h)
- void **setDestCoord** (int x, int y)
- void **setDestSize** (int w, int h)
- void **setDestX** (int x)
- void **setDestY** (int y)
- void **setDestW** (int w)
- void **setDestH** (int h)
- int **getDestX** () const
- int **getDestY** () const
- int **getDestW** () const
- int **getDestH** () const
- void **setPos** (int x, int y, int w, int h)
- void **setPosCoord** (int x, int y)
- void **setPosSize** (int w, int h)
- void **setPosX** (int x)
- void **setPosY** (int y)
- void **setPosW** (int w)
- void **setPosH** (int h)
- int **getPosX** () const
- int **getPosY** () const
- int **getPosW** () const
- int **getPosH** () const
- void **moveFrame** (int x, int y)
- void **moveFrameX** (int x)
- void **moveFrameY** (int y)
- void **moveDest** (int x, int y)
- void **moveDestX** (int x)
- void **moveDestY** (int y)
- void **movePos** (int x, int y)
- void **movePosX** (int x)
- void **movePosY** (int y)
- double **getVelX** ()
- double **getVelY** ()

- void **setVelX** (double vx)
- void **setVelY** (double vy)
- void **setVelTo** (int x, int y)
- double **getSpeed** ()
- void **setSpeed** (double s)
- void **setName** (string s)
- string **getName** ()
- void **centerOn** ([Input](#) i)
- void **centerOn** (int cx, int cy)
- void **centerOn** ([Object](#) obj)
- void **lookAt** ([Input](#) i)
- void **setColor** (color c)
- void **setColor** (Uint8 r, Uint8 g, Uint8 b)
- void **setTransparency** (Uint8 a)
- bool **imageSet** () const
- color **getColor** () const
- void **rotateAngle** (int rot)
- void **moveToVel** ()

Public Attributes

- color **red** = {0xff,0,0,0xff}
- color **green** = {0,0xff,0,0xff}
- color **blue** = {0,0,0xff,0xff}

3.13.1 Detailed Description

This class stores information for an [Object](#) in the game.

Definition at line 12 of file `object.h`.

The documentation for this class was generated from the following files:

- `object.h`
- `object.cpp`

3.14 PerlinNoise Class Reference

Public Member Functions

- **PerlinNoise** (double _persistence, double _frequency, double _amplitude, int _octaves, int _randomseed)
- double **GetHeight** (double x, double y) const
- double **Persistence** () const
- double **Frequency** () const
- double **Amplitude** () const
- int **Octaves** () const
- int **RandomSeed** () const
- void **Set** (double _persistence, double _frequency, double _amplitude, int _octaves, int _randomseed)
- void **SetPersistence** (double _persistence)
- void **SetFrequency** (double _frequency)
- void **SetAmplitude** (double _amplitude)
- void **SetOctaves** (int _octaves)
- void **SetRandomSeed** (int _randomseed)

3.14.1 Detailed Description

Definition at line 5 of file PerlinNoise.h.

The documentation for this class was generated from the following files:

- PerlinNoise.h
- PerlinNoise.cpp

3.15 Physics Class Reference

Class for doing physics functions.

```
#include <physics-tmp.h>
```

Public Member Functions

- [Object moveTowards](#) ([Object](#) cur, [Object](#) des)
Returns modified first [Object](#) that is moving towards the second object (I THINK).

3.15.1 Detailed Description

Class for doing physics functions.

Definition at line 23 of file physics-tmp.h.

The documentation for this class was generated from the following files:

- physics-tmp.h
- physics-tmp.cpp

3.16 Stage Class Reference

The [Stage](#) class stores a [Map](#) and [Tileset](#).

```
#include <stage.h>
```

Public Member Functions

- void `createStage` (`Map` m, `Tileset` t)
 - Create a stage by passing in a [Map](#) and [Tileset](#).*
- void `createStage` (string filename, string name, string img, `SDL_Renderer *`ren, int width, int height, int r, int count)
 - Create a stage by passing in the maps file, a name for the tiles, file of the tile image, the renderer, width and height of a tile, what row of the image the tiles are onem and how many tiles there are.*
- void **`createStage`** (string filename, string name, string img, `SDL_Renderer *`ren, int width, int height, int r, int rcount, int count)
- void **`createStage`** (string filename, int startid, string name, string img, `SDL_Renderer *`ren, int width, int height, int r, int count)
- void **`createStage`** (string filename, int startid, string name, string img, `SDL_Renderer *`ren, int width, int height, int r, int rcount, int count)
- void `setMap` (`Map` m)
 - Set the [Map](#) by passing in a [Map](#).*
- `Map` `setMap` (string filename)
 - Load in a new map by passing in the map file.*
- `Map` `getMap` () const
 - Get the [Map](#).*
- void `setTileset` (`Tileset` t)
 - Set the [Tileset](#) with a given [Tileset](#).*
- `Tileset` **`setTileset`** (string name, string img, `SDL_Renderer *`ren, int width, int height, int r, int count)
- `Tileset` **`setTileset`** (string name, string img, `SDL_Renderer *`ren, int width, int height, int r, int rcount, int count)
- `Tileset` **`setTileset`** (int startid, string name, string img, `SDL_Renderer *`ren, int width, int height, int r, int count)
- `Tileset` **`setTileset`** (int startid, string name, string img, `SDL_Renderer *`ren, int width, int height, int r, int rcount, int count)
- `Tileset` `getTileset` () const
 - Get the [Tileset](#).*

3.16.1 Detailed Description

The `Stage` class stores a `Map` and `Tileset`.

Definition at line 8 of file stage.h.

The documentation for this class was generated from the following files:


- stage.h
- stage.cpp

3.17 Tile Class Reference


An `Object` class that stores the a tile value and name.

```
#include <tile.h>
```

Inheritance diagram for Tile:



Collaboration diagram for Tile:

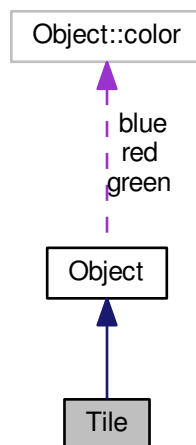

Public Member Functions

- void `setValue` (int v)
Set value of the tile. This is used when reading from a map file, etc.
- int `getValue` () const
Get the value of the `Tile`.
- void `setSolid` ()
Set if the `Tile` is solid.
- void `setPassable` ()
Set if the `Tile` is passable (not solid).
- bool `isSolid` () const
Check if the `Tile` is solid.

Additional Inherited Members

3.17.1 Detailed Description

An [Object](#) class that stores the a tile value and name.

Definition at line 7 of file tile.h.

The documentation for this class was generated from the following files:

- tile.h
- tile.cpp

3.18 Tileset Class Reference

Class for loading in multiple Tiles.

```
#include <tileset.h>
```

Public Member Functions

- `vector< Tile > getTileset () const`
- `SDL_Rect getFrame (int i)`
- `vector< Tile > create (string name, string img, SDL_Renderer *ren, int width, int height, int r, int count)`
Load in a map file with the name for all the tiles, the path to the map file, path to the tileset image, the SDL renderer, width and height of a tile, row to begin from on the image, how many tiles there are in the image.
- `vector< Tile > create (string name, string img, SDL_Renderer *ren, int width, int height, int r, int rcount, int count)`
Load a map with a given name for the tiles, the file path to the map, the path to the tileset image, SDL renderer, width and height of a tile, row to begin on in the image, how many tiles on a certain row in the image, total amount of tiles in the image.
- `vector< Tile > create (int startid, string name, string img, SDL_Renderer *ren, int width, int height, int r, int count)`
Load in a map file with the name for all the tiles, the path to the map file, path to the tileset image, the SDL renderer, width and height of a tile, row to begin from on the image, how many tiles there are in the image.
- `vector< Tile > create (int startid, string name, string img, SDL_Renderer *ren, int width, int height, int r, int rcount, int count)`
Load a map with a given name for the tiles, the file path to the map, the path to the tileset image, SDL renderer, width and height of a tile, row to begin on in the image, how many tiles on a certain row in the image, total amount of tiles in the image.
- `void addTile (Tile t)`
Push [Tile](#) in tile with given [Tile](#).
- `Tile addTile (string name, string file, SDL_Renderer *ren, int value, int r, int c, int width, int height)`
Generate and push [Tile](#) with tile name, path tot he tile image, SDL renderer, tile value, row and colung the tile as on in the image, the tiles width and height.
- `Tile addTile (string name, string file, SDL_Renderer *ren, int value, int width, int height)`
Generate and push [Tile](#) with a given name, path to image file, SDL renderer, given value, and tile width and height.
- `Tile addTile (string name, string file, SDL_Renderer *ren, int value, int size)`
Generate and push [Tile](#) with a given name, path to the image, SDL renderer, value, and size (used for width and height).
- `void setAngle (int ang)`

Set the angle of all the tiles. Calls pushAng().

- void **setSolid** ()
- void **setSolid** (int t)
- void **setSolid** (int s, int e)
- void **setPassable** ()
- void **setPassable** (int t)
- void **setPassable** (int s, int e)
- void **setName** (string n, int id)

3.18.1 Detailed Description

Class for loading in multiple Tiles.

Definition at line 8 of file tileset.h.

The documentation for this class was generated from the following files:

- tileset.h
- tileset.cpp

Index

Audio, [5](#)

Background, [5](#)

Collision, [6](#)

Engine, [8](#)

 update, [10](#)

Engine::color, [7](#)

Entity, [10](#)

GameState, [12](#)

Image, [13](#)

Input, [13](#)

Level, [16](#)

Map, [17](#)

Model, [18](#)

Object, [18](#)

PerlinNoise, [21](#)

Physics, [22](#)

Stage, [22](#)

Tile, [23](#)

Tileset, [25](#)

update

 Engine, [10](#)